

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

GC-334

Total Pages in this Submission

45

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

Locking Device For Tools And Equipment

and invented by:

Darren J. Kady and Deborah A. Kady

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

Continuation Divisional Continuation-in-part (CIP) of prior application No.: 60/065,941

Which is a:

Continuation Divisional Continuation-in-part (CIP) of prior application No.: _____

Which is a:

Continuation Divisional Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. Filing fee as calculated and transmitted as described below
2. Specification having 16 pages and including the following:
 - a. Descriptive Title of the Invention
 - b. Cross References to Related Applications (*if applicable*)
 - c. Statement Regarding Federally-sponsored Research/Development (*if applicable*)
 - d. Reference to Microfiche Appendix (*if applicable*)
 - e. Background of the Invention
 - f. Brief Summary of the Invention
 - g. Brief Description of the Drawings (*if drawings filed*)
 - h. Detailed Description
 - i. Claim(s) as Classified Below
 - j. Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

GC-334

Total Pages in this Submission

45

Application Elements (Continued)

3. Drawing(s) (*when necessary as prescribed by 35 USC 113*)
a. Formal b. Informal Number of Sheets 12
4. Oath or Declaration
a. Newly executed (*original or copy*) Unexecuted
b. Copy from a prior application (37 CFR 1.63(d)) (*for continuation/divisional application only*)
c. With Power of Attorney Without Power of Attorney
d. **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. Incorporation By Reference (*usable if Box 4b is checked*)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. Computer Program in Microfiche
7. Genetic Sequence Submission (*if applicable, all must be included*)
a. Paper Copy
b. Computer Readable Copy
c. Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. Assignment Papers (*cover sheet & documents*)
9. 37 CFR 3.73(b) Statement (*when there is an assignee*)
10. English Translation Document (*if applicable*)
11. Information Disclosure Statement/PTO-1449 Copies of IDS Citations
12. Preliminary Amendment
13. Acknowledgment postcard
14. Certificate of Mailing

First Class Express Mail (*Specify Label No.*): EL177427699US

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
GC-334

Total Pages in this Submission

45

Accompanying Application Parts (Continued)

15. Certified Copy of Priority Document(s) (*if foreign priority is claimed*)
16. Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. Additional Enclosures (*please identify below*):

Notification of Filing of Continuing or Divisional Application

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	18	- 20 =	0	x \$11.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$41.00	\$0.00
Multiple Dependent Claims (check if applicable)	<input type="checkbox"/>				\$0.00
				BASIC FEE	\$395.00
OTHER FEE (specify purpose)					\$0.00
				TOTAL FILING FEE	\$395.00

- A check in the amount of \$395.00 to cover the filing fee is enclosed.
- The Commissioner is hereby authorized to charge and credit Deposit Account No. 16-0478 as described below. A duplicate copy of this sheet is enclosed.
- Charge the amount of _____ as filing fee.
 - Credit any overpayment.
 - Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: October 26, 1998



Signature

Sheldon H. Parker
300 Preston Avenue, Suite 300
Charlottesville, VA 22902
(804) 977-6606
Reg. No. 20,738

CC:



A

PATENT**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: Darren J. Kady + Deborah A. Kady

Serial No.: 60/065,941 Group No.:

Filed: 10/27/97 Examiner:

For: Locking Device for Tools and Equipment

JCS49 U.S. PRO
09/178837

10/26/98

Commissioner of Patents and Trademarks

Washington, D.C. 20231

NOTIFICATION OF FILING OF CONTINUING OR DIVISIONAL APPLICATION

Notification is hereby being made of the filing of a:

- continuation
 continuation-in-part
 divisional

application for this case

- concurrently herewith
 on _____

(date)

SIGNATURE OF ATTORNEY

Sheldon H. Parker

Type or print name of attorney

Reg. No. 20,738

Tel. No.: (804) 977-6606

300 Preston Avenue, Suite 300

P.O. Address

Charlottesville, VA 22902

CERTIFICATE OF MAILING

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited on the date shown below with the United States Postal Service in an envelope addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

37 CFR 1.8(a)

(check and complete appropriate item below).

37 CFR 1.10

 with sufficient postage
or first class mail as "Express Mail Post Office
to Addressee" Mailing Label
No. EL171427699USValinda K. Drumheller
(Type or print name of person mailing paper)Valinda K. Drumheller
(Signature of person mailing paper)

Date 10-26-98

ADDED PAGES FOR APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED

NOTE: "In order for an application to claim the benefit of a prior filed copending national application, the prior application must name as an inventor at least one inventor named in the later filed application and disclose the named inventor's invention claimed in at least one claim of the later filed application in the manner provided by the first paragraph of 35 U.S.C. 112." 37 CFR 1.78(a).

NOTE: "In addition the prior application must be (1) complete as set forth in § 1.51, or (2) entitled to a filing date as set forth in § 1.53(b) and include the basic filing fee set forth in § 1.16; or (3) entitled to a filing date as set forth in § 1.53(b) and have paid therein the processing and retention fee set forth in § 1.21(l) within the time period set forth in § 1.53(d)." 37 CFR 1.78(a).

17. Relate Back—35 U.S.C. 120

NOTE: "Any application claiming the benefit of a prior filed copending national or international application must contain or be amended to contain in the first sentence of the specification following the title a reference to such prior application identifying it by serial number and filing date or international application number and international filing date and indicating the relationship of the applications." 37 CFR 1.78(a). See also the Notice of April 28, 1987 (1079 O.G. 32 to 46).

- Amend the Specification by inserting before the first line the sentence:

"This is a

- continuation
 continuation-in-part
 divisional

of copending application(s)

serial number 01 065, 941 filed on 10/27/97
 International Application _____ filed on _____ and which designated the U.S."

NOTE: The proper reference to a prior filed PCT application which entered the U.S. national phase is the U.S. serial number and the filing date of the PCT application which designated the U.S.

NOTE: (1) Where the application being transmitted adds subject matter to the International Application then the filing can be as a continuation-in-part or (2) it is desired to do so for other reasons, e.g. where no declaration is available, no English translation is available or no fee is to be paid on filing then the filing can be as a continuation. In these cases the International Application designating the U.S. is treated as the parent case in the U.S. and is an alternative to the completion of the International Application under 35 U.S.C. 371(c)(4) which must meet the requirements of 37 CFR 1.61(a). This alternative permits the completion of the filing requirements within any term set by the PTO under 37 CFR 1.53(d) to which the extension provisions of 37 CFR 1.136(a) apply. (Whereas, if the filing is as an international application entering the U.S. stage then the fee, declaration and/or English translation (where necessary) is due within 20 months of the priority date but can be paid within 22 months of the priority date (or is due within 30 months of the priority date but can be submitted within 32 months of the priority date) with the surcharges set forth in 37 CFR 1.492(e), (f) and 37 CFR 1.495(c); however, the provisions of 37 CFR 1.136 do not apply to this 22 or (32 month) period. 37 CFR 1.61(b).)

NOTE: The deadline for entering the national phase in the U.S. for an international application was clarified in the Notice of April 28, 1987 (1079 O.G. 32 to 46) as follows:

"The Patent and Trademark Office considers the International application to be pending until the 22nd month from the priority date if the United States has been designated and no Demand for International Preliminary Examination has been filed prior to the expiration of the 19th month from the priority date and until the 32nd month from the priority date if a Demand for International Preliminary Examination which elected the United States of America has been filed prior to the expiration of the 19th month from the priority date, provided that a copy of the international application has been communicated to the Patent and Trademark Office within the 20 or 30 month period respectively. If a copy of the international application has not been communicated to the Patent and Trademark Office within the 20 or 30 month period respectively, the international application becomes abandoned as to the United States 20

or 30 months from the priority date respectively. These periods have been placed in the rules as paragraph (h) of § 1.494 and paragraph (i) of § 1.495. A continuing application under 35 U.S.C. 365(c) and 120 may be filed anytime during the pendency of the international application."

18. Relate Back—35 U.S.C. 119 Priority Claim for Prior Application

The prior U.S. application(s), including any prior International Application designating the U.S., identified above in item 17, in turn itself claim(s) foreign priority (ies) as follows:

country	appl. no.	filed on
---------	-----------	----------

The certified copy (ies) has (have)

- been filed on _____ in prior application O / _____ which was filed on _____
 is (are) attached

WARNING: *The certified copy of the priority application which may have been communicated to the PTO by the International Bureau may not be relied on without any need to file a certified copy of the priority application in the continuing application. This is so because the certified copy of the priority application communicated by the International Bureau is placed in a folder and is not assigned a U.S. serial number unless the national stage is entered. Such folders are disposed of if the national stage is not entered. Therefore such certified copies may not be available if needed later in the prosecution of a continuing application. An alternative would be to physically remove the priority documents from the folders and transfer them to the continuing application. The resources required to request transfer, retrieve the folders, make suitable record notations, transfer the certified copies, enter and make a record of such copies in the Continuing Application are substantial. Accordingly, the priority documents in folders of international applications which have not entered the national stage may not be relied on. Notice of April 28, 1987 (1079 O.G. 32 to 46).*

19. Maintenance of Copendency of Prior Application

NOTE: *The PTO finds it useful if a copy of the petition filed in the prior application extending the term for response is filed with the papers constituting the filing of the continuation application. Notice of November 5, 1985 (1060 O.G. 27).*

A. Extension of time in prior application

(This item must be completed and the papers filed in the prior application if the period set in the prior application has run)

- A petition, fee and response extends the term in the pending prior application until _____
 A copy of the petition filed in prior application is attached

B. Conditional Petition for Extension of Time in Prior Application

(complete this item if previous item not applicable)

- A conditional petition for extension of time is being filed in the pending prior application.
 A copy of the conditional petition filed in the prior application is attached

20. Further Inventorship Statement Where Benefit of Prior Application(s) Claimed

NOTE: *"If the continuation, continuation-in-part, or divisional application is filed by less than all the inventors named in the prior application a statement must accompany the application when filed requesting deletion of the names of the person or persons who are not inventors of the invention being claimed in the continuation, continuation-in-part, or divisional application." 37 CFR 1.62(a) [emphasis added]. (dealing with the file wrapper continuation situation).*

NOTE: *"In the case of a continuation-in-part application which adds and claims additional disclosure by amendment, an oath or declaration as required by § 1.63 must be filed. In those situations where a new oath or declaration is required due to additional subject matter being claimed, additional inventors may be named in the continuing application. In a continuation or divisional application which discloses*

(Added Pages for Application Transmittal Where Benefit of Prior U.S. Application(s) Claimed [4-1.1]—page 2 of 4)

and claims only subject matter disclosed in a prior application, no additional oath or declaration is required and the application must name as inventors the same or less than all the inventors in the prior application." 37 CFR 1.60(c). (dealing with the continuation situation).

(complete applicable item (a), (b) and/or (c) below)

- (a) This application discloses and claims only subject matter disclosed in the prior application whose particulars are set out above and the inventor(s) in this application are
- the same
 less than those named in the prior application and it is requested that the following inventor(s) identified for the prior application be deleted:

(Type name(s) of inventor(s) to be deleted)

- (b) This application discloses and claims additional disclosure by amendment and a new declaration or oath is being filed. With respect to the prior application the inventor(s) in this application are
- the same
 the following additional inventor(s) have been added

(Type name(s) of inventor(s) to be added)

- (c) The inventorship for all the claims in this application are
- the same
 not the same, and an explanation, including the ownership of the various claims at the time the last claimed invention was made
 is submitted
 will be submitted

21. Abandonment of Prior Application (if applicable)

- Please abandon the prior application at a time while the prior application is pending or when the petition for extension of time or to revive in that application is granted and when this application is granted a filing date so as to make this application copending with said prior application.

NOTE: According to the Notice of May 13, 1983 (103, TMOG 6-7) the filing of a continuation or continuation-in-part application is a proper response with respect to a petition for extension of time or a petition to revive and should include the express abandonment of the prior application conditioned upon the granting of the petition and the granting of a filing date to the continuing application.

22. Petition for Suspension of Prosecution for the Time Necessary to File an Amendment

WARNING: "The claims of a new application may be finally rejected in the first Office action in those situations where (1) the new application is a continuing application of, or a substitute for, an earlier application, and (2) all the claims of the new application (a) are drawn to the same invention claimed in the earlier application, and (b) would have been properly finally rejected on the grounds of art of record in the next Office action if they had been entered in the earlier application." MPEP, § 706.07(b).

NOTE: Where it is possible that the claims on file will give rise to a first action final for this continuation application and for some reason an amendment cannot be filed promptly (e.g., experimental data is being gathered) it may be desirable to file a petition for suspension of prosecution for the time necessary.

(check the next item, if applicable)

- There is provided herewith a Petition To Suspend Prosecution for the Time Necessary to File An Amendment (New Application Filed Concurrently)

23. NOTIFICATION IN PARENT APPLICATION OF THIS FILING

- A notification of the filing of this
(check one of the following)

- continuation
 continuation-in-part
 divisional

is being filed in the parent application from which this application claims priority under 35 USC § 120.

FEDERAL REGISTER VOL. 57, NO. 144, JULY 24, 2002

(Added Pages for Application Transmittal Where Benefit of Prior U.S. Application(s)
Claimed [4-1.1]—page 4 of 4)

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) AND 1.27 (b)) - INDEPENDENT INVENTOR

Docket No.
GC-334

Serial No.	Filing Date	Patent No.	Issue Date

Applicant/ **Darren J. Kady and Deborah A. Kady**

Patentee:

Invention: **Locking Device For Tools And Equipment**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled above and described in:

- the specification to be filed herewith.
- the application identified above.
- the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- No such person, concern or organization exists.
- Each such person, concern or organization is listed below.

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

FULL NAME _____

ADDRESS _____

Individual Small Business Concern Nonprofit Organization

FULL NAME _____

ADDRESS _____

Individual Small Business Concern Nonprofit Organization

FULL NAME _____

ADDRESS _____

Individual Small Business Concern Nonprofit Organization

FULL NAME _____

ADDRESS _____

Individual Small Business Concern Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.26(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR Darren J. Kady

SIGNATURE OF INVENTOR Darren J. Kady

DATE: 10/22/98

NAME OF INVENTOR Deborah A. Kady

SIGNATURE OF INVENTOR Deborah A. Kady

DATE: 10/22/98

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

1

2 LOCKING DEVICE FOR TOOLS AND EQUIPMENT

3 BACKGROUND OF THE INVENTION

4 Field of the Invention

5 The device relates to a safety device that, once activated, allows the equipment to run for a
6 preprogrammed period of time. In some embodiments the device is used as a antitheft device
7 without use of the timing mode. The use of an activation code prevents theft and resale of
8 protected equipment.

9 Brief Description of the Prior Art

10 Tools offer a temptation to thieves as they are easy to resell due to lack of distinctive
11 features. Further, few people mark their tools as faithfully as they would their stereo equipment.
12 Even tools that have been marked can be sold to an unknowing purchaser prior to police reports
13 being issued and few individuals check for stolen merchandise. The problem also arises in
14 construction companies that tools are stolen from a job site, leading to costly replacements.

15 SUMMARY OF THE INVENTION

16 A locking device is disclosed for use on tools, electronic and mechanical equipment, heavy
17 equipment and machinery, gas-powered vehicles and various other wheeled vehicles. The device
18 provides the option of permitting the equipment to be operated for a predetermined period of time.

19 Electronic circuitry within the device, in conjunction with an unlocking and optional timer
20 operation, requires that the equipment be unlocked prior to use. A time period for operation can be
21 programmed into the equipment, after which time the unit shuts off. This reduces theft as well as
22 preventing unauthorized use of the item.

23 The operating control device is for use with equipment having an exterior case, a power
24 source, an activation member and a driver member. The control device has an input device to
25 enable the input of user access codes and a readout panel to monitor the status of the equipment. A

1 control member is in communication with the input device, readout panel, power source, driver
2 member and activation member. The control member prevents operation of the equipment by
3 preventing the transfer of power from the power source to the driver member without the entry of a
4 user code. Entry of the user code enables the power to flow from the power source to the activation
5 member to the driver member, thereby activating the equipment. The control device can further
6 include a programmable timer to communicate with the control member thereby enabling the power
7 flow from the power source to the driver member for the predetermined period of time entered at
8 the input device. A clock member can track time and activate and deactivate the timer based on user
9 input. The communication between the control member and the input device, readout panel,
10 power source, driver member and activation member can be through electrical wires that can be
11 encased in a solid material to make the control member and wires inaccessible. The locking device
12 can be used on equipment such as hand tools, electronics or fuel pumps.

13 When used directly on a fuel pump, the control member prevents the fuel pump from
14 enabling fuel to flow from the gas tank to the engine without the input of a proper user code.
15 Alternatively, the control device can be a fuel line shutoff valve to prevent fuel from traveling along
16 the line. A solenoid can be used in the shutoff valve to prevent flow of fuel from the gas tank to the
17 driver. In one embodiment, a solenoid is used to enable fuel to flow from the fuel tank, or power
18 source, to the activation member, or engine.

19 A locking device, encompassed by an exterior case, for use on bicycles interacts with the
20 axle connecting the peddles. A engagement disk, having multiple ports along its circumference, is
21 unmoveably affixed to the axle causing the disk to rotate with the axle. A locking bar, positioned
22 within a brace affixed to the exterior case, engages one of the ports in the engagement disk to
23 prevent rotation of the axle. A locking bar activation member engages and disengages the locking
24 bar with the engagement disk. The locking device can be a manually operated lock, a solenoid

1 having a power source and being activated by an input member. A resetable timer can display the
2 lapsed time on a display panel. A removable access panel permits the user to access the exterior case
3 and locking bar.

4 **BRIEF DESCRIPTION OF THE DRAWINGS**

5 The advantages of the instant disclosure will become more apparent when read with the
6 specification and the drawings, wherein:

7 FIGURE 1 is a side view of an example hand tool incorporating the locking device;

8 FIGURE 2 is a cutaway view of the interior of the locking arm and solenoid of the instant
9 invention,

10 FIGURE 3 is a top view of an example controller configuration;

11 FIGURE 4 is the schematic of an example wiring for the locking device for use with a
12 hand tool,

13 FIGURE 5 is a cutaway side view of the interior of the hand tool of Figure 1;

14 FIGURE 6 is a cutaway side view of an alternate embodiment of a hand tool utilizing the
15 disclosed locking device;

16 FIGURE 7 is a side view of the instant device for use with a air tool system;

17 FIGURE 8 is a schematic of the wiring for use with the locking device used in conjunction
18 with air tools;

19 FIGURE 9 is a cutaway rear view of the mechanically activated bicycle locking device;

20 FIGURE 10 is a side view of the bicycle locking device of Figure 9 mounted in a bicycle;

21 FIGURE 11 is a top view of the engagement disk for use with the bicycle locking device;

22 FIGURE 12 is a side view of the bicycle locking device of Figure 11 mounted in a bicycle;

23 FIGURE 13 is a cutaway view of the solenoid activated bicycle locking device mounted on
24 a bicycle;

25 FIGURE 14 is an exploded view of the engagement disk and latching solenoid;

1 FIGURE 15 is a schematic of the wiring for use with electronic devices;

2 FIGURE 16 is a schematic of the wiring for use with the locking device incorporating the
3 analogue function;

4 FIGURE 17 is a schematic of the wiring for use with the locking device on mechanical
5 apparatus, such as bicycles;

6 FIGURE 18 is a side view of a fuel pump containing the solenoid switch;

7 FIGURE 19 is a perspective view of the control box and shut off valve placed along the
8 fuel line; and

9 FIGURE 20 is a perspective view of the control box and shut off valve mounted
10 separately.

DETAILED DESCRIPTION OF THE INVENTION

11 The disclosed invention relates to a coded locking mechanism that discourages theft. In
12 addition to the inherent advantages obtained through the locking device as disclosed, further safety
13 advantages are achieved simply by its existence. It will be obvious to anyone who buys an item
14 containing the locking device that unless the seller has the code, the item is most likely stolen. Most
15 theft of portable items, such as tools, bicycles and electronics, is related to resale of the item.

16 Generally this resale is through pawn shops, or individuals, who have no way of tracing ownership
17 of the item. The disclosed locking device controls the activation of the item, preventing activation
18 without the entry of user codes. Without access to the codes, the item is useless and unsaleable.

19 Bicycles have been, to date, difficult to protect against theft. The standard means for
20 securing a bicycle is to chain the frame to a non-movable object. The thief, however, can simply cut
21 the chain and ride the bike away. The disclosed device locks the peddles, thereby preventing the
22 bike from being ridden and requiring a thief to pick the bicycle up and carry it off. The addition of
23 an alarm will further deter the theft of the bike. Except in secluded areas, this would cause far more

1 attention than most thieves are willing to risk. The incorporation of the disclosed device installed on
2 a bicycle is discussed in detail further herein.

3 Gas and diesel powered vehicles, whether automobiles or forklifts, are always in danger of
4 being stolen. Various alarm systems have come out for automobiles, however few have been
5 successful in preventing "hot wiring". The disclosed device attaches to either the fuel line or fuel
6 pump, to prevent fuel from reaching the engine.

7 The locking mechanism can be of a type that does not require the use of a key, or other
8 device, thereby avoiding an additional item to lose or carry. Alternatively, other locking means can
9 be used, such as magnetic card readers, standard keys, telephone signals, infrared code or radio
10 frequency transmitters and receivers, etc. Iris scans, finger printing or other means for registering a
11 user currently known in the art can be incorporated where applicable to the equipment. The touch
12 key scanning technology can easily be incorporated into the device, thereby permitting data relating
13 to the item to be tracked. The scanning technology provides benefits in a laboratory or other setting
14 where equipment is centralized and removed for use. Each employee would have a personalized
15 touch key that records the employee name, time of removal, etc. The disclosed device is easily
16 incorporated into electronic devices, such as televisions, cameras, VCRs, stereo equipment,
17 computers, camcorders, etc. at the time of manufacture. Alternatively the device can be retrofitted
18 into the power source, such as the power cord or plug. The use of microchips, or analog,
19 technology permits various functions to be monitored, such as scheduling service, based on use
20 time or the number of hours an item has been used.

21 When installed on a computer, the disclosed device can be connected directly to the power
22 supply permitting businesses that sell computer time to automatically enter the sleep mode, shut
23 down or otherwise place the computer in an non-active status, unless additional time is purchased.
24 In home use, the device permits parental control on the amount of time, or specific time periods,
25 the computer, or other electronic device such as a TV, can be used by a child. Thus, the computer,

1 VCR or TV could only be activated after homework is completed, etc. The device can be easily
2 modified to either shut down the equipment completely or, as in the case of computers, place the
3 device in the "sleep" or inoperative mode. Computers are especially adaptable to keyboard
4 programming of the device, although a keyboard interface can be included with any of the locking
5 devices disclosed. A program embedded in the device's microchip can allow for a simple timer
6 setting that is activated through key input on the keyboard. As an option, a direct coding key can be
7 incorporated on the keyboard that automatically accesses the program and permits activation,
8 setting changes, etc. Although computer lock out programs are known in the prior art, they totally
9 lock out use of the computer. The disclosed device permits access to the computer for a
10 predetermined period of time either at random or within a specific schedule time period. A
11 warning light is preferably incorporated to permit the user to save data prior to placing the
12 computer in the inactive mode. The user entering the time restraints would set up the program with
13 a user code to prevent unauthorized changes to the program.

14 The disclosed locking device is also advantageous for rental equipment, such as generators,
15 compressors, VCR's, etc., in that the rented equipment can be programmed for a specific period of
16 time and after that point be automatically deactivated. This discourages the theft of rental
17 equipment, thereby reducing insurance and liability, since by preventing unauthorized use, especially
18 when used in conjunction with larger equipment, insurance rates would potentially be reduced.

19 In electronic equipment, such as TVs, VCRs, etc. containing infra red remote controllers,
20 the timing activation device can be activated through the remote controller. Once activated the
21 program would appear on the screen and utilize either existing or specific keys to set the shut down
22 time, user time periods, etc. This would be an inexpensive addition to a controller and increase
23 user convenience. Alternatively the controller itself can be used to set the time of use, without the
24 appearance of the setting program on the screen.

1 It should be noted that the use of analogue, key scanners, infra red, etc. taught herein for
2 use by a specific embodiment, is not limited to that embodiment. Each embodiment of the locking
3 device disclosed herein can incorporate the electronics, memory, etc. as described herein in relation
4 to any other embodiment.

5 A hand drill, as illustrated in Figures 1 and 2, is used to illustrate the disclosed mechanism
6 used to limit user time, however this is as an example only and is not intended to limit the
7 invention. In order to facilitate the description of the embodiments herein, the recipient of the
8 power received will be referred to herein as the driver. The power tool 10 is illustrated in Figure 1
9 ready for use, incorporating a numeric keypad 12 as the locking mechanism. Other activating
10 mechanisms will be apparent to those skilled in the art when read in conjunction with the
11 disclosure. As stated heretofore, in many applications advantages are provided by not having an
12 additional device to activate the tool. However, in some residential and commercial applications, the
13 separate activation device can be desirable. It is preferable when using this embodiment to protect
14 devices owned by the user, that the use be on a timed basis rather than an on-off basis. Forgetting
15 to the turn off access to the device would negate the advantages to the disclosed locking device.
16 This is overcome by incorporating a timer that deactivates the equipment after a preset period of
17 non-use, requiring reactivation through the appropriate method. The lapsed period of time can be
18 factory set or programmed in by the user.

19 The time can be set through any means appropriate to the equipment being used as well as
20 the final use. For example, the time can be through repeatedly touching a specific key, jumping the
21 time by predetermined increments. Alternatively, an "enter" key can be provided which allows entry
22 of the unlocking code and subsequent entry of a predetermined period of time. Preferably all timed
23 locking devices are provided with nonvolatile memory to prevent the loss of programmed
24 instructions in the event the item's battery goes dead or is removed. This is more critical with
25 rechargeable hand tools where completely discharging the battery is sometimes required to fully

1 recharge. On larger items, such as construction equipment or generators, a cellular dial in can be
2 included to allow the addition of time to be accomplished remotely from the owner's location. A
3 microphone can be added to the locking device to receive, and register, a code consisting of
4 telephone touch tones to extend the operation time. Various other methods can also be used, and
5 these methods will be evident to those skilled in the art.

6 The locking code can be factory set and the code numbers provided at time of purchase.
7 Alternatively, the locking code can be reprogrammable either by the user or by a factory
8 representative. The reprogrammable feature enables the code to be changed when required, such as
9 sale of the tool. The device can be capable of being reprogrammed more than one time, however,
10 the number of reprogrammings allowed, and the party performing the reprogramming, all affects
11 the security of the device. For maximum security, while still allowing reprogramming, the device is
12 provided with only one or two opportunities to reprogram the code and the reprogramming would
13 be completed at a service center. In the optimum configuration, other readings are also provided
14 that would be critical to the operation of the device. The incorporation of a microchip to register
15 the locking codes and program the activation time further provides the added ability to monitor
16 various other tool functions. For example, an LED display 14 of Figure 1 can be included which
17 indicates the activation time remaining and, if desired, the current status of the tool. The status can
18 include, for example, current battery power (both during recharge and discharge), pressure
19 remaining when air tools are used, rpm and direction of drills, etc. This is of optimum use in
20 monitoring the status of rechargeable batteries. Since many rechargeable batteries do not either fully
21 charge unless fully discharged prior to recharging, the battery monitoring device permits optimum
22 use and management of the battery. It should also be noted that an LED could be provided on the
23 recharging device to monitor the battery recharge thereby serving as a double check to the LED on
24 the device being charged.

1 In Figure 2 one design of the internal activation unit 40 is illustrated. The locking arm 48 is
2 supported between the upper case side 42 and the lower case side 44. The spring tension 50 is
3 designed to place the solenoid contact 56 in physical contact with the solenoid 52 when the locking
4 arm 48 is pulled back during use. Once the locking arm 48 is released, the solenoid contact 56 is
5 removed from contact with the solenoid 52. The solenoid 52 receives power from the battery 108
6 (Figure 5) through the controller 80, an example of which is illustrated in more detail in Figure 3.
7 As can be seen from the example schematic of Figure 4, the controller 80 serves as the central
8 processing area, with all input and output passing through the controller 80. The controller 80 is
9 connected directly to the locking mechanism, such as a numeric keypad 12, through the keypad
10 wiring 100. The battery wiring 102 and motor wiring 104 also feed into the controller 80. Once the
11 locking means, such as numeric keypad 12, is activated, all connections are made and power is free
12 to go to the driver specific to the power tool 10. The exact schematic of the wiring is not critical, as
13 the criticality lies with in the interaction between the locking means and the controller 80. The
14 interior of the hand tool 10, as shown in Figure 5, is traditionally spaced, with the controller 80
15 located within the handle area. In this embodiment, the various connecting wires 100, 102 and 104
16 are exposed and, in the event of theft, the case can be opened and the wires cut and crossed to
17 bypass the controller 80. In order to prevent a thief from opening the case and by passing the
18 controller 80, the case is provided with a safety lock key having a number of different
19 embodiments One embodiment is to incorporate a locking member , wired to the controller
20 through the locking wire 156, that is deactivated by a locking code, key or other compatible
21 methods. The controller 80 can be programmed to allow the case to release, for example through a
22 separate code being entered or by holding down the last number of the existing code for a
23 predetermined time period. A separate code is preferable in that it prevents any unauthorized
24 access to the interior of the case. For maximum security, the safety lock key would be available only
25 to certified dealers and service companies for the specific brand or obtained directly from the dealer

1 by mail, etc. By providing the safety lock key, if the tool was stolen and tampered with for sale or
2 pawn, the by-pass would be apparent due to the broken casing.

3 In an alternative embodiment to the safety lock key, the solenoid 126 and wiring 122 are
4 encased in an epoxy, indicated herein as region 128, as illustrated in Figure 6. By encasing the
5 wiring 122 within the epoxy, it is impossible to rewire the unit and bypass the controller 124. Other
6 materials, known in the art, can be used to replace the epoxy. To facilitate the placement of the
7 epoxy region 128, the wiring 122 from the motor 120 exits the motor casing proximate the
8 controller 124, which has been placed as close as possible to the solenoid 126. This revised
9 placement reduces the area to be protected, thereby reducing material and labor costs. Revising the
10 placement of the battery 130 is difficult, preventing in some instances the battery wiring 132 from
11 being covered. However, with the controller 124 and solenoid 126 both encased in epoxy, there
12 would be no value to cutting the battery wire 132, as there would not be any accessible power
13 connections.

14 In Figure 7, the locking device is illustrated being used with an air tool 200, although it
15 should be noted that the device can also be used with propane, gas, and diesel tools and equipment.
16 This embodiment is additionally applicable for use with electric tools and equipment having a
17 power cord. The controller unit 202, as illustrated, is located in the handle 204 of the air tool.
18 Due to the spread out nature of the air tools, the use of a safety key lock is, in some instances, more
19 practical than redesigning the interior of the unit to allow the wiring to be embedded in epoxy. This
20 is a choice of the manufacturer based on cost, specific tool, etc. As can be seen in the example
21 schematics of Figure 4 (battery) and Figure 8 (air tool) there is little difference in wiring between the
22 two. As stated, in the schematic of Figure 4 the touch key wiring 100 goes to the controller 80, as
23 does the battery wire 102 and the motor wire 104. In the air tool, or other removed power source,
24 the touch key wiring 150 and solenoid 154 wiring feed into the controller 152 and onto the driver,
25 the battery and motor connections being eliminated.

1 As stated heretofore, the disclosed device can be easily incorporated with electronic
2 equipment. The schematic of Figure 15 is an example of the electronics for a device being
3 incorporated into a computer, VCR, television, etc. As can be seen, the basic functioning of the
4 antitheft device is the same as used for a battery or air tool. As in the schematics disclosed
5 heretofore, the touch key wiring 302 feeds into the controller 304. In this embodiment, however,
6 the electric wiring 306 is connected to the controller 304 through the latching relay wires 308. The
7 schematic of Figure 16 provides an example of the electronic layout, disclosed in Figure 15, to
8 incorporate the analogue function into the device through analog wiring 350.

9 One use of the disclosed invention is in commercial industries with workers using company
10 owned tools and equipment. The tools are activated in the morning to run for an entire shift, at
11 which point they shut down. This prevents theft from outside sources as well as employees.
12 Additionally by reactivating the tools each morning, a "safety check" can be incorporated with the
13 activation to prevent faulty equipment from being used.

14 The locking device can further be used with bicycles, shopping carts, wheelchairs, etc. It
15 should be noted, however, that since the locking devices disclosed herein operate on bicycles by
16 stopping movement of the pedals, this device is not recommended for bikes, or other items that
17 have foot brakes. In the event, that the device was activated during use, the user would be unable to
18 activate the brakes. The example used herein is a bicycle, however the device, as disclosed, can
19 easily be adapted for a variety of other wheeled devices. The locking device for use with bicycles, or
20 other applicable devices, preferably has a weight of about one (1) pound or less

21 Figures 9, 10 and 11 illustrate a manual version of the locking device 200 for use with
22 wheeled vehicles and is illustrated on a bicycle. The locking mechanisms within the locking device
23 are located within a protective case 202 to prevent tampering. The case 202 is welded to the front
24 frame 230 and rear frame 232 as currently done in the art replacing the standard joint at the

1 juncture of the front and rear supports. The case 202 is slightly larger than standard cases to
2 accommodate the locking device 200. The pedal axle 204 passes through the case 202 and is
3 attached to the pedals 236 as known in the art. The engagement disk 208 has a centered receiving
4 hole 220 that permits the disk 208 to be mounted on the axle 204. The disk 208 is welded to the
5 axle 204 to cause the disk 208 to rotate with the axle 204 as the bicycle is pedaled. The disk 208
6 contains a series of receiving holes 222 around its periphery. The receiving holes 222 are
7 dimensioned to receive the locking bar 210 that has been encased in the locking brace 216. The
8 locking brace 216 is secured to the case 202 to prevent movement of the bar 210 and therefore
9 movement of the pedals 236 once the bar 210 is in the locked position. When in the unlocked
10 position, the locking bar 210 is drawn into the locking brace 216. Once placed into the locked
11 position, the bar 210 engages the receiving holes 222 of the disk 208 and prevents the pedals 236
12 from turning. The locking brace 216 must be securely affixed to the case 202 to prevent the brace
13 216 from dislodging when a user attempts to pedal during the locked mode. Additionally, the
14 locking bar 210 must have sufficient strength to prevent the bar 210 from snapping or bending. In
15 the embodiment of Figure 9 the bar 210 is placed into either the locked or unlocked position by a
16 key lock 206, or other mechanically operated device. The interior mechanisms moving the locking
17 bar 210 in response to the key lock 206 are like those of dead bolts for doors and other methods
18 will be known to those skilled in the art.

19 To provide the ability to repair the locking device in the event a problem arises; a bottom
20 plate 214 is incorporated into the locking device 200. The bottom plate 214 illustrated has a rotating
21 lock 212 that is secured to a locking plate 220. The flanges 218 extend into the open area of the
22 case 202 and provide support for the locking plate 220 when rotated to the locked position.
23 Rotation of the rotating lock 212 moves the locking plate 220 into a position to clear the flanges,
24 thereby permitting removal of the bottom plate 214. The locking mechanism for the bottom plate is

1 an example of a method for locking the bottom plate onto the case and other methods known in the
2 art can be used.

3 An automatic embodiment of the locking mechanism for use with bicycles is illustrated in
4 Figures 12 – 14. The engagement disk 308 is welded to the pedal axle 324 as described heretofore.
5 Rather than the manual lock of Figure 9, the interacting locking bar 326 is operated by a
6 battery-powered solenoid 304. The solenoid 304 is maintained in position through use of a casing
7 306 that is securely affixed to the outer case 302. As stated heretofore, the locking bar 326 must be
8 capable of withstanding the pressure exerted by a person attempting to pedal the bike. The batteries
9 340 to power the solenoid 304 can be contained within the front support 342 or other location
10 convenient for manufacture. The use of a battery-powered solenoid also permits the use of a timer
11 as disclosed for use with the hand tool of Figure 1. The analogue timer is advantageous for
12 companies renting bikes by the hour or day as the timer can be activated upon the bike being
13 removed from the shop and the time read and calculated upon return. The timer readout, entry
14 method, etc., can be incorporated in either the front support 342 or back support 344.

15 The base plate 312 uses an alternate design to the embodiment of Figure 9. In this
16 embodiment, the base plate 312 is provided with a key lock 314 that is attached to dual rotating
17 bars 320 and 322. The sides of the case 302 are provided with flange pairs 318 and 316 that are
18 dimensioned to interact with the rotating bars 320 and 322. Thus, as the key lock 314 is turned, the
19 bars 320 and 322 move out of their interaction with the flange pairs 318 and 316, thereby releasing
20 the base plate 312.

21 The disclosed device is applicable for use with any gas powered vehicles, from heavy
22 equipment, such as fork lifts, bull dosers, automobiles or boats. The locking device is not
23 compatible with the electronic starter system of the newer equipment and is too easily by-passed.
24 The device is, instead, placed along the fuel line cutting off the supply of fuel to the engine or,
25 alternatively, placed on the exterior or in the casing of the fuel pump. The fuel pump and/or line is

1 not readily accessible, thereby preventing the locking device from being either removed or "hot
2 wired". Due to safety concerns, the timed shutoff feature would not be included on all vehicle
3 applications, such as automobiles or boats, however in some instances, such as boat rentals, the
4 time-lapsed feature would be beneficial.

5 The disclosed security device 482 is illustrated in Figure 18 in conjunction with a fuel
6 pump 480. The security device 482 is activated, or deactivated, by touch key, infra red, manual key,
7 etc. The exact activation/deactivation method would be dependent upon the type of vehicle, end
8 use and cost considerations. For a new personal automobile, the security device 482 could be
9 activated/deactivated as part of the infra red door lock system. Therefore, when the doors are

10 locked, using the remote infra red pad, the security device 482 would shut off power to the fuel
11 pump 480. When the doors are unlocked, the power would be restored to the fuel pump 480.

12 Alternatively, a touch key can be used to activate/deactivate the security device 482. The receiving
13 portion of the touch key can be placed within the car and the transmitting portion affixed to a key
14 ring. Thus, the user would deactivate the security device 482 upon leaving the car and reactivate the
15 power to the fuel pump 480 upon returning. The ability of the touch keys to be programmed would
16 allow only certain users to activate the device 482.

17 The security device 482 uses the sample electronics as illustrated in Figure 4, although
18 other methods will be obvious to those skilled in the art. The power leads 486 are placed directly
19 into the security device 482. Power is then directed from the security device 482 to the fuel pump
20 480 through leads 484. Preferably the security device 482 and fuel pump 480 are encased as one
21 unit to avoid overriding the security system.

22 In Figure 19 fuel line shutoff system 500, control box 504, is in physical proximity to the
23 shut off valve 502. The shut off valve 502 is preferably an explosion proof solenoid valve, such as
24 manufactured by Asco and identified as EF8262/8263. These, or alternate valves meeting the safety
25 criteria and having the ability to block fuel flow, are mounted directly onto the fuel line 506 to

1 control the fuel flow to the engine. The control box 504 provides the electronics to direct the valve
2 502 to open or close the fuel line 506. The control box 504 can receive signals to activate or
3 deactivate fuel flow through any of the disclosed methods as well as those known in the art.

4 In Figure 20 the control box 524 is separated from the shutoff valve 520. The valve 520 is
5 mounted directly on the fuel line 522 and meets the criteria disclosed in Figure 19. The control box
6 524 is connected to the valve 520 through use of power leads 526, thereby permitting the control
7 box 524 to be spaced a desired distance from the valve 520. The control box 524 receives power
8 from the battery, or independent power source, through the power lead 528.

9 Any of the foregoing embodiments can be connected to an indicator light within the
10 vehicle to notify the user that the fuel line is either activated or deactivated. Additionally, the
11 disclosed fuel shut off devices can be retrofitted onto the gas vehicle by a mechanic. In the event
12 that infra red activation/deactivation is desired, a sensor and corresponding pad can be easily
13 installed in the vehicle. The solenoid can also be incorporated with the timing device to block the
14 fuel supply on a timed basis, however user safety must be considered prior to shutting down the
15 fuel supply to a moving vehicle. The timer can be used to prevent a gas powered vehicle from
16 being used during a certain period.

17 The locking device disclosed herein, whether used on hand tools or heavy equipment, can
18 be used in either a timer mode and/or a security device. In instances where the time used is not an
19 issue and the owner is merely looking to prevent theft of the equipment, the device serves as a
20 security measure

21 Since other modifications and changes varied to fit particular operating requirements and
22 environments will be apparent to those skilled in the art, the invention is not considered limited to

- 1 the example chosen for the purposes of disclosure, and covers all changes and modifications that do
- 2 not constitute departures from the true spirit and scope of this invention.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
688
689
689
690
691
692
693
694
695
696
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
788
789
789
790
791
792
793
794
795
796
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
888
889
889
890
891
892
893
894
895
896
897
898
899
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
918
919
919
920
921
922
923
924
925
926
927
928
929
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
988
989
989
990
991
992
993
994
995
996
997
998
999
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1929
1930
1931
1932
1933
1934
1935

1 What is Claimed is:

- 2 1. An operating control device for use with equipment having an exterior case, a power
3 source, an activation member and a driver member, said control device having:
4 an input device, said input device permitting input of user identification;
5 a control member, said control member being in communication with said input device,
6 said power source, said driver member and said activation member,
7 wherein said control member prevents operation of said equipment by preventing power to
8 transfer from said power source to said driver member without entry of said user code, entry of said
9 user code enabling power to flow from said power source to said activation member to said driver
10 member, thereby activating said equipment.
- 11 2. The operating control device of claim 1 further comprising a readout panel, said readout
12 panel providing a status of said operating control device and being in communication with said
13 control member.
- 14 3. The operating control device of claim 1 wherein said control device further comprises a
15 programmable timer, said timer communicating with said control member and enabling power to
16 flow from said power source to said driver member for a predetermined period of time, said
17 predetermined period of time being entered at said input device.
- 18 4. The operating control device of claim 3 further comprising a clock member, said clock
19 member activating and deactivating said timer based on user input.
- 20 5. The operating control device of claim 1 wherein said communication is by electrical wires
- 21 6. The operating control device of claim 5 wherein said control member and said wires are
22 encased in a solid material, thereby making said control member and said wires inaccessible.
- 23 7. The operating control device of claim 1 wherein said equipment is a hand tool.
- 24 8. The operating control device of claim 1 wherein said equipment is electronic.
- 25

1 9. The operating control device of claim 8 wherein said electronic equipment is a fuel pump,
2 said control member preventing said fuel pump from enabling fuel to flow from a gas tank to an
3 engine.

4 10. The operating control device of claim 8 wherein said electronic equipment is a fuel line
5 shutoff valve, said activation member in said shutoff valve being a solenoid to prevent flow of fuel
6 from a gas tank to said driver member.

7 11. The operating control device of claim 1 wherein said control device further comprises a
8 delay timer, said delay timer communicating with said control member to notify said control
9 member of inactivation of said driver member for a predetermined period of time, wherein said
10 control member prevents further transfer of power from said power source to said driver member
11 until entry of said user code.

12 12. The operating control device of claim 1 further comprising a locking device for said
13 exterior case, said locking device preventing nonuser access to said control device.

14 13. The operating control device of claim 1 further comprising a solenoid, said solenoid
15 connecting said activation member to said power source.

16 14. A locking device for use on bicycles having a pair of peddles connected by an axle, said
17 locking device having

18 an exterior case, said exterior case encompassing said axle;
19 an engagement disk, said engagement disk having multiple ports along its circumference
20 and being unmoveably affixed to said axle causing said disk to rotate with said axle;
21 a brace, said brace being affixed to said exterior case;
22 a locking bar, said locking bar being positioned within said brace to permit said locking bar
23 to engage one of said ports in said engagement disk to prevent rotation of said axle,
24 locking bar activation member, said activation member engaging and disengaging said
25 locking bar with said engagement disk.

- 1 15. The locking device of claim 14 wherein said activation member is a manually operated lock.
- 2 16. The locking device of claim 14 wherein said activation member is a solenoid, said solenoid
- 3 having a power source and being activated by an input member.
- 4 17. The locking device of claim 14 further comprising a resetable timer, said timer displaying
- 5 lapsed time on a display panel.
- 6 18. The locking device of claim 14 further comprising a removable access panel, said
- 7 removable access panel permitting user access to said exterior case and therefore said locking bar.

SEARCHED
INDEXED
SERIALIZED
FILED
APR 20 1999
U.S. PATENT AND TRADEMARK OFFICE

1

ABSTRACT OF THE INVENTION

2 The operating control device can be used on equipment such as hand tools, electronics or
3 fuel pumps. An input device enables the input of user access codes and a readout panel monitors
4 the equipment status. A control member is in communication with the input device, readout panel,
5 power source, driver member and activation member to prevent operation of the equipment by
6 requiring entry of a user code. The control device can include a programmable timer to
7 communicate with the control member to enable the power to flow from the power source to the
8 driver member for a predetermined period of time. A clock can track time and activate and
9 deactivate the timer. The communication can be through electrical wires that can be encased in a
10 solid material to make the control member and wires inaccessible. When used directly on a fuel
11 pump, the control member prevents fuel from reaching the engine without the input of a proper
12 user code. Alternatively, the control device can be a fuel line shutoff valve to prevent fuel from
13 traveling along the line. A solenoid can be used in the shutoff valve to prevent flow of fuel from the
14 gas tank to the driver. A locking device for use on bicycles interacts with the axle connecting the
15 peddles. A engagement disk, having multiple ports along its circumference, is unmoveably affixed
16 to the axle. A locking bar activation member engages and disengages a locking bar with the
17 engagement disk to prevent rotation of the axle.

18



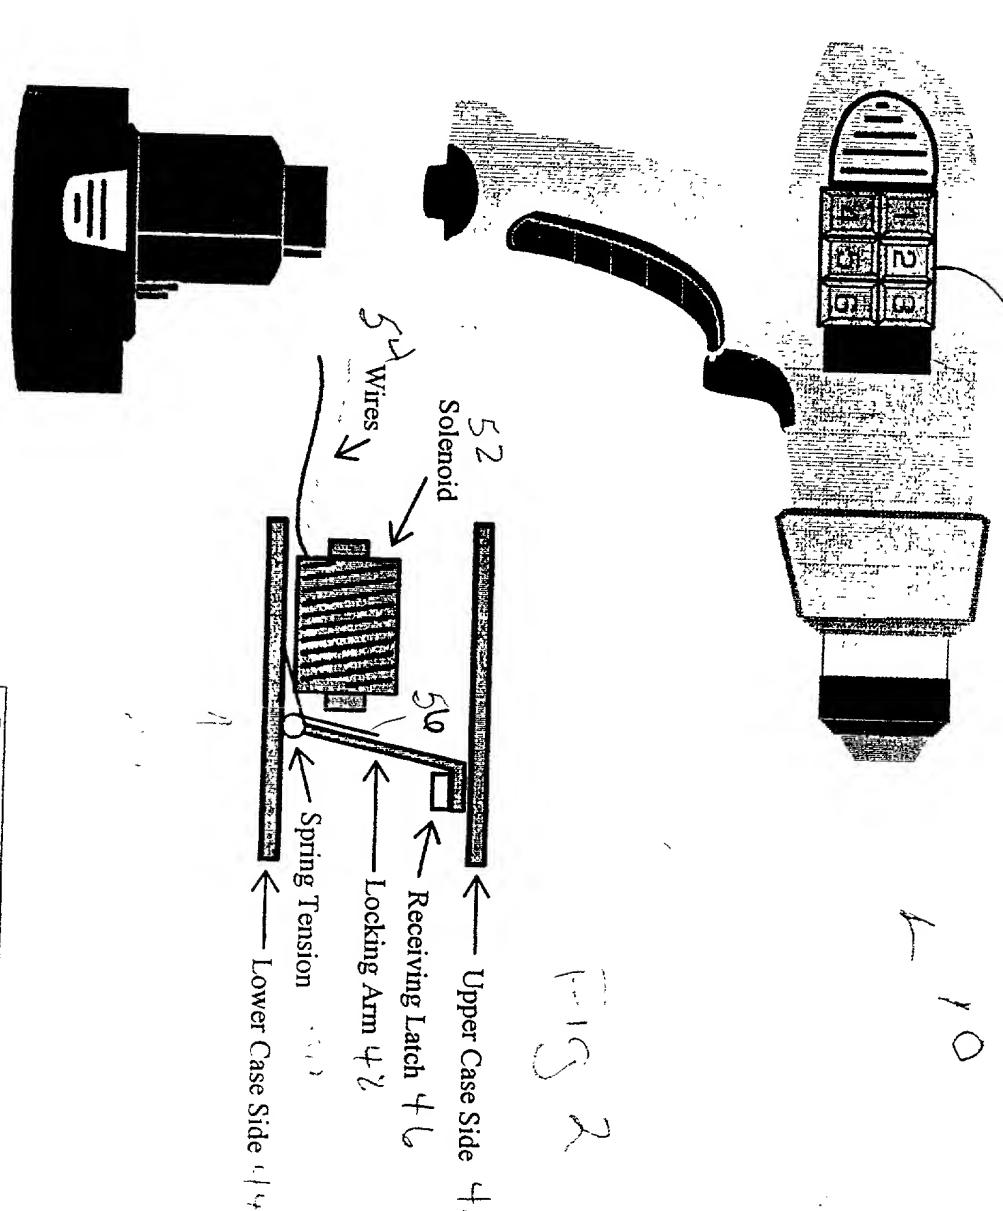


Fig 2
Fig 10

Darren J. Kady

511 Story Point Rd.
Barbourville, VA 24923
Tel: 804-978-4003 Fax: 804-975-4003

Title	Anti-theft and safety lock		
Size	8	Document Number	
Date	Friday, September 05, 1997	Sheet	1 of 1

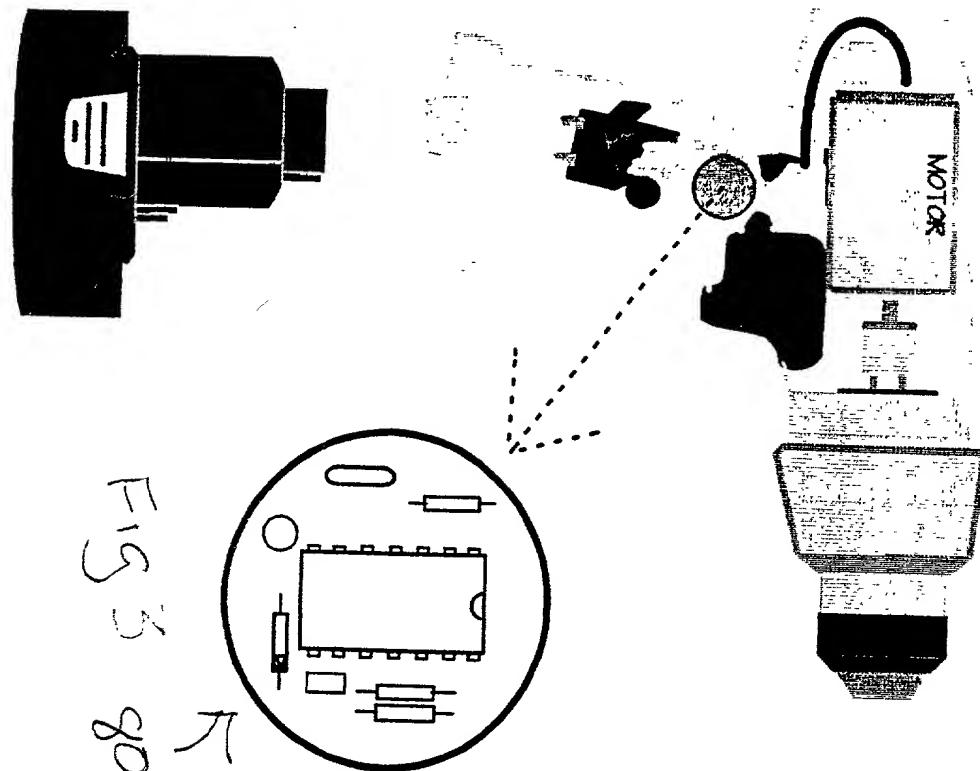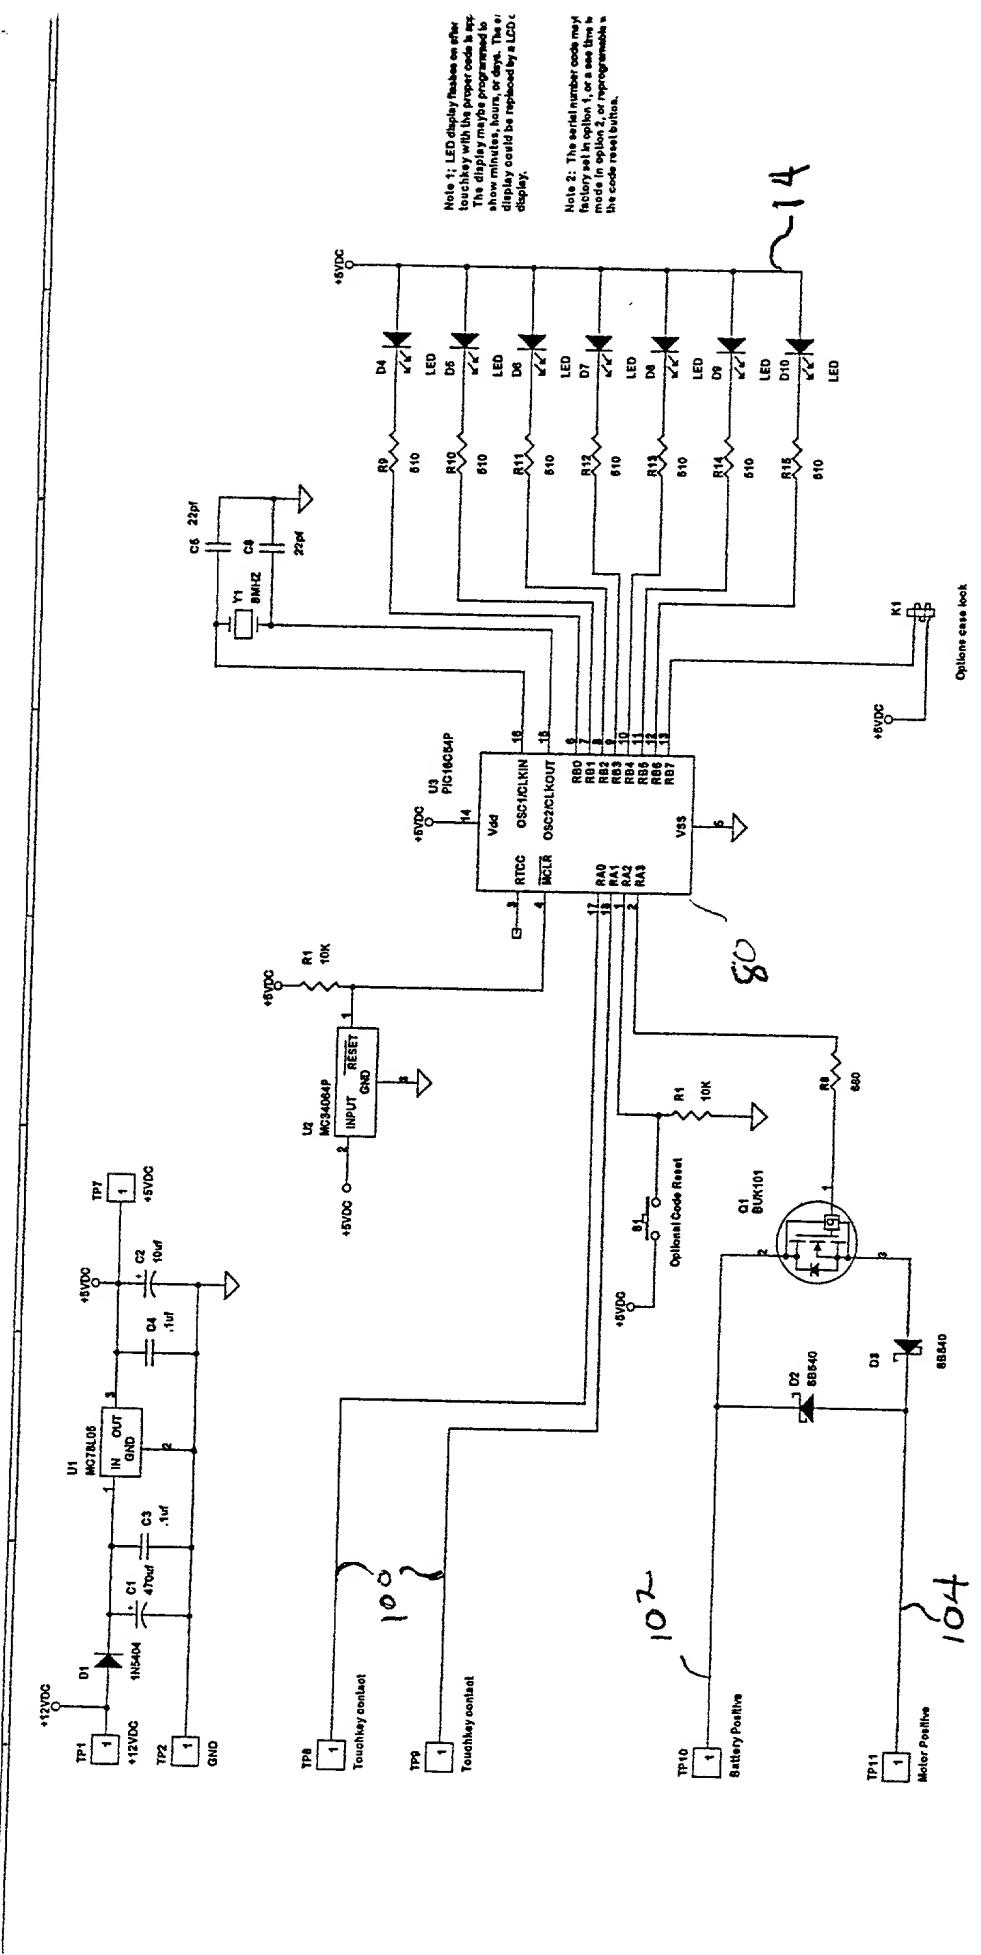

Darren J. Kady
511 Stony Point Rd
Barbourville, VA 24823
Tel: 804-978-4003 Fax: 804-975-4003
Title: Anti-theft and safety lock
Size: B Document Number:
Sheet: 1

Date: Thursday, September 04, 1997

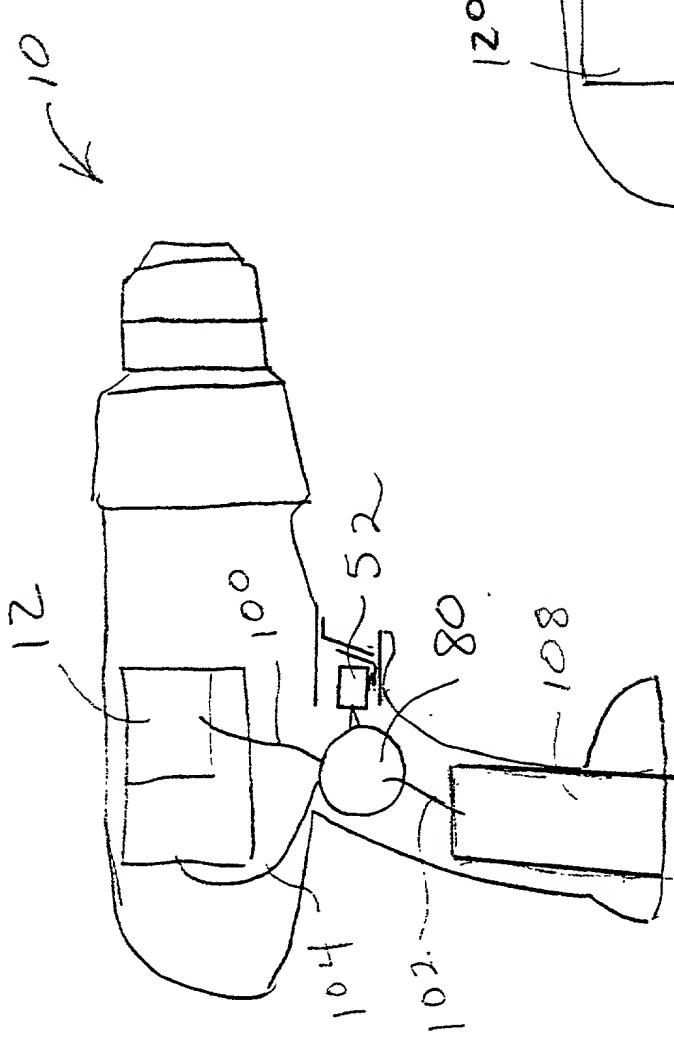


Fig 5




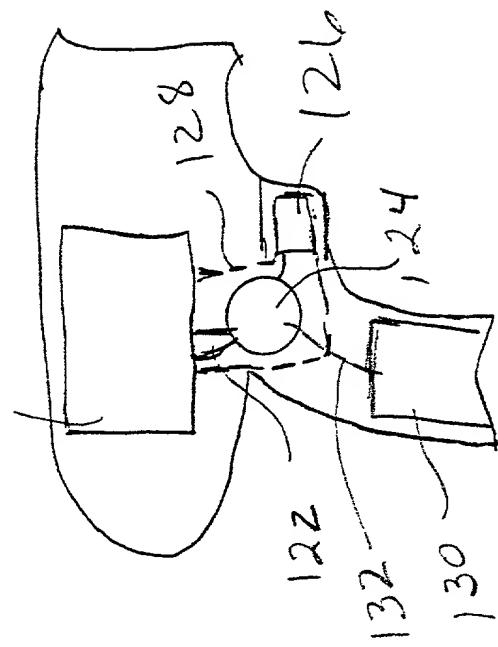



Fig 6

FIG 7

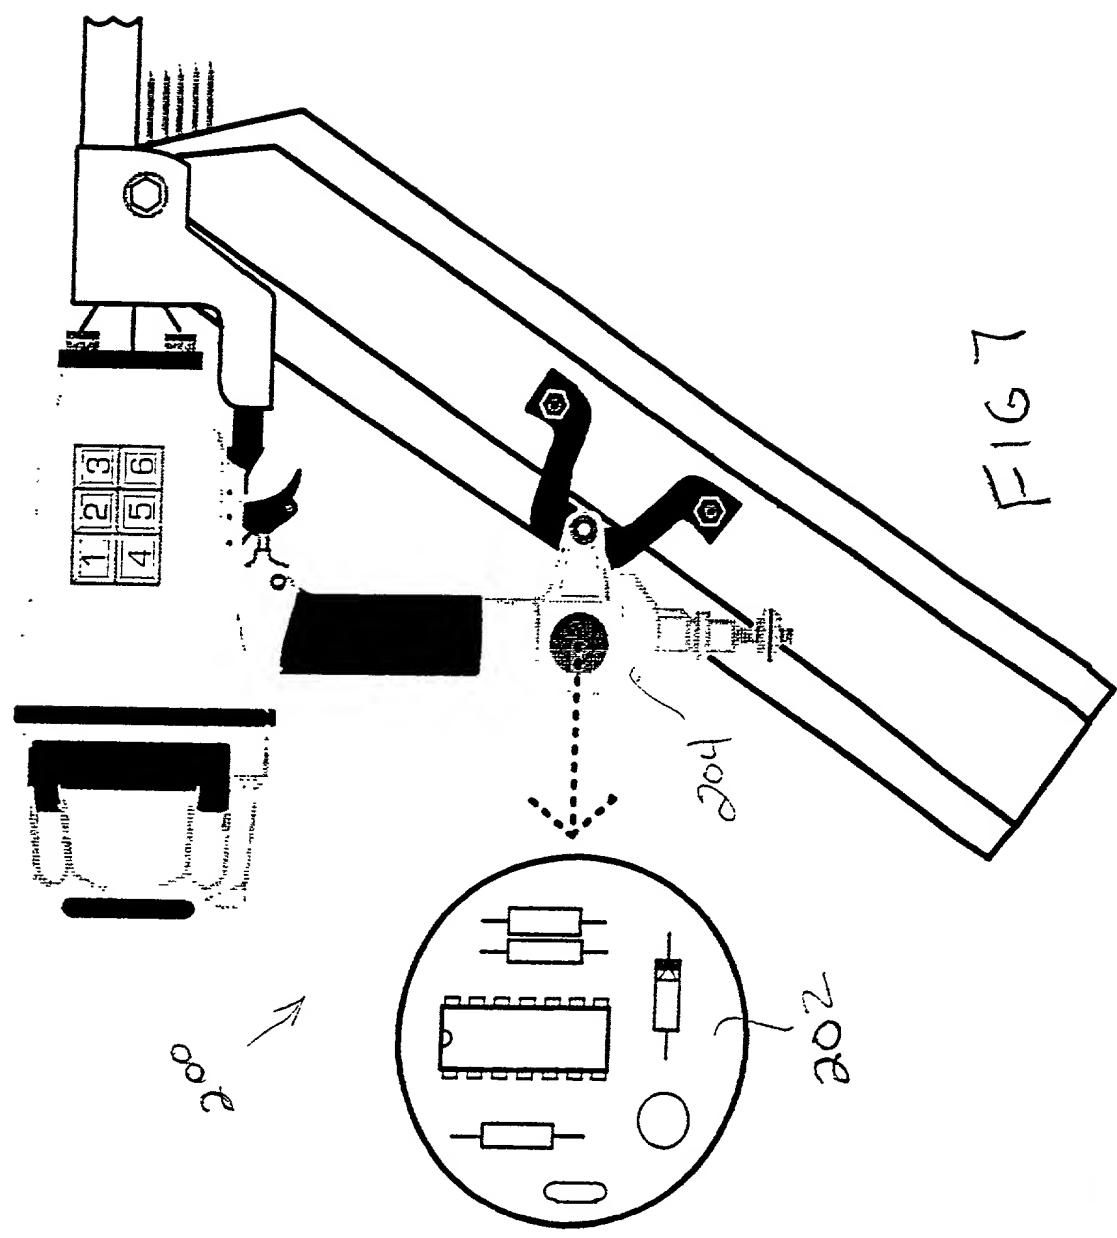

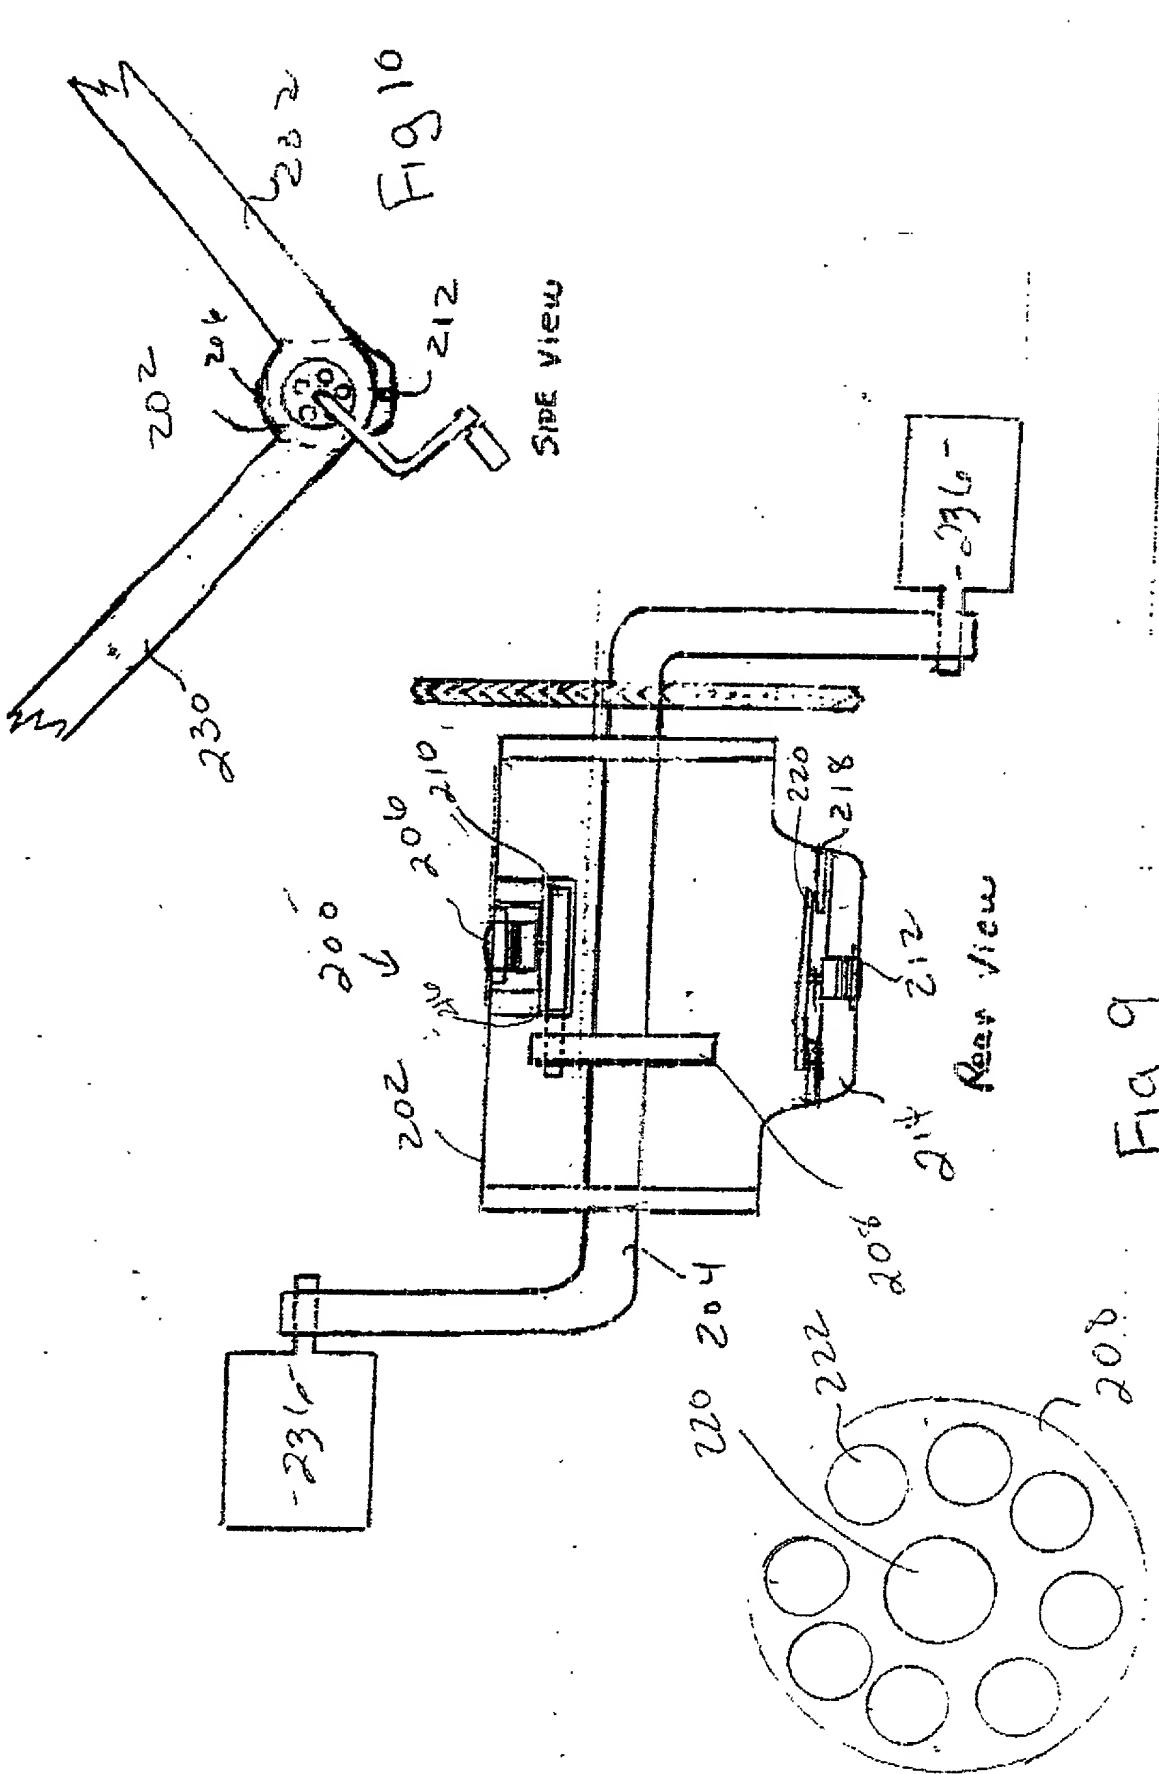

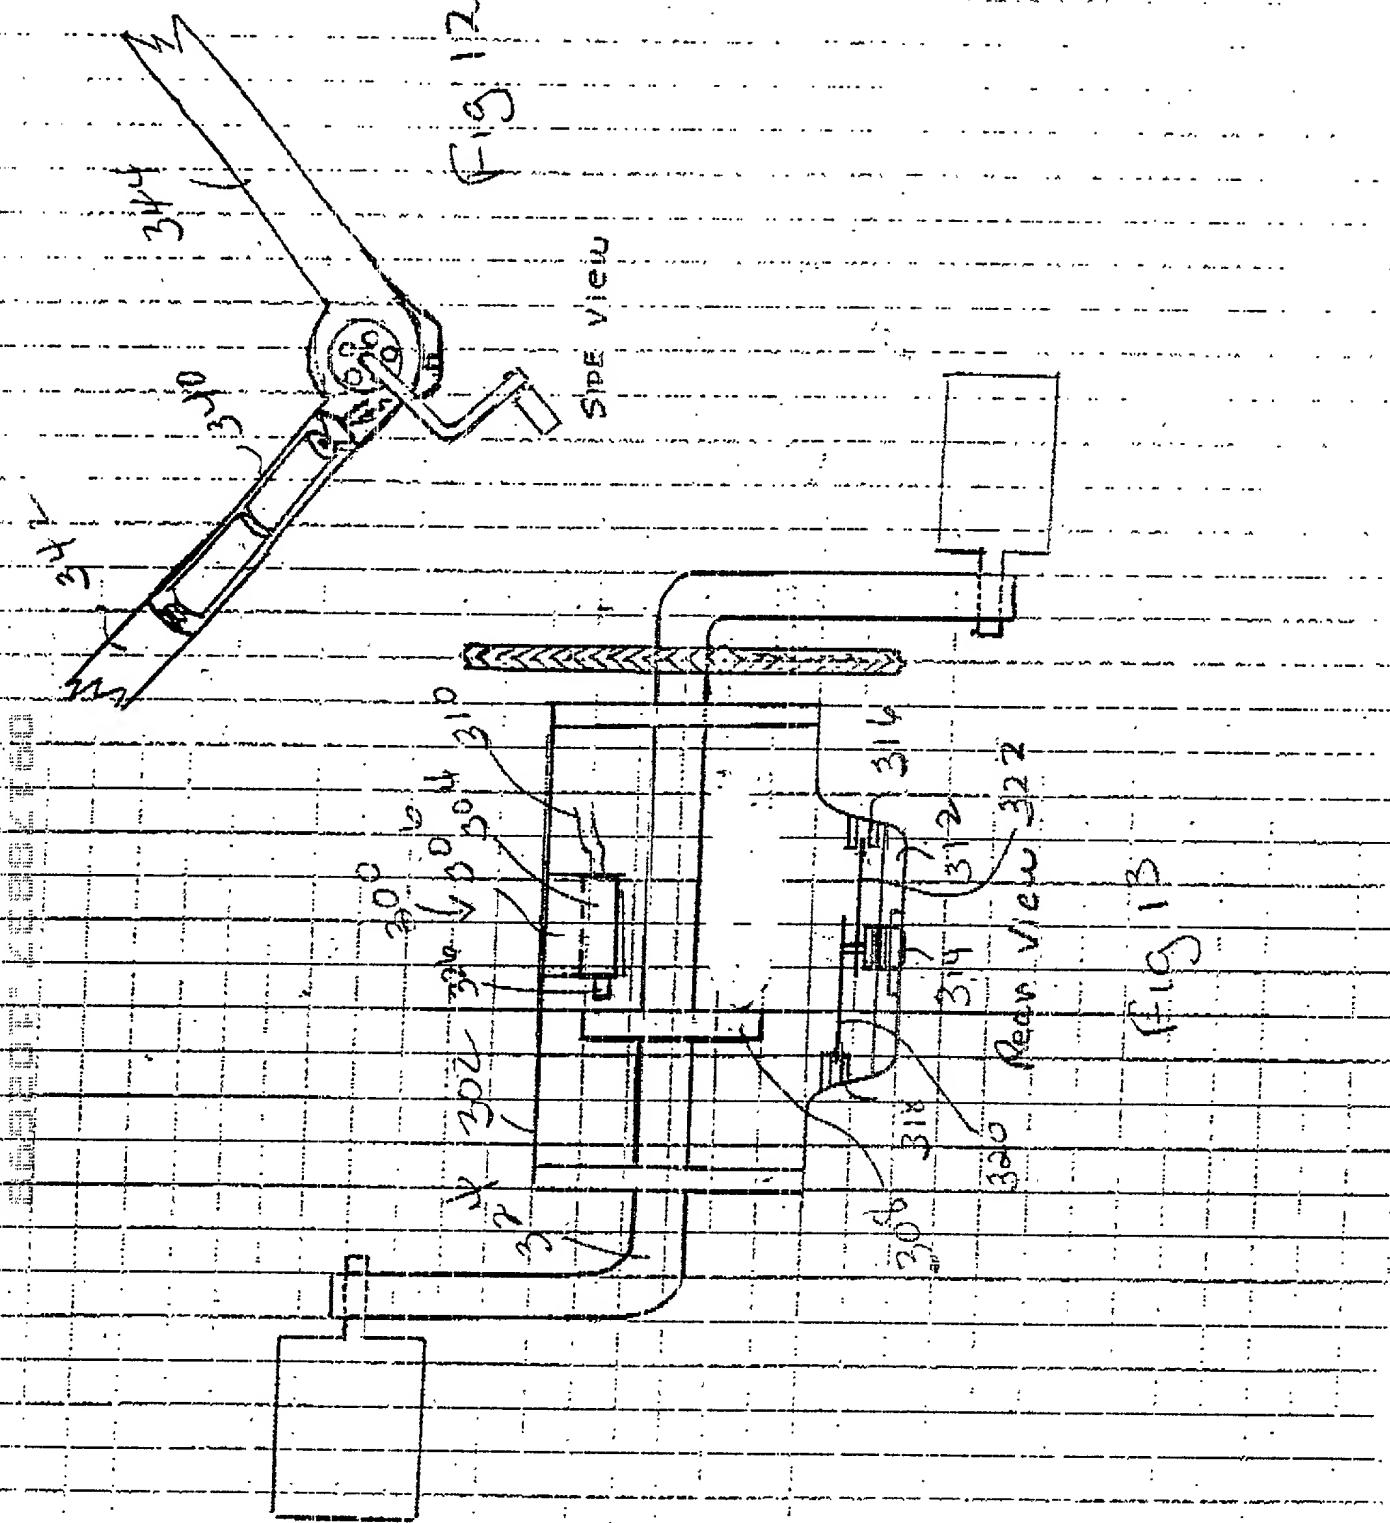

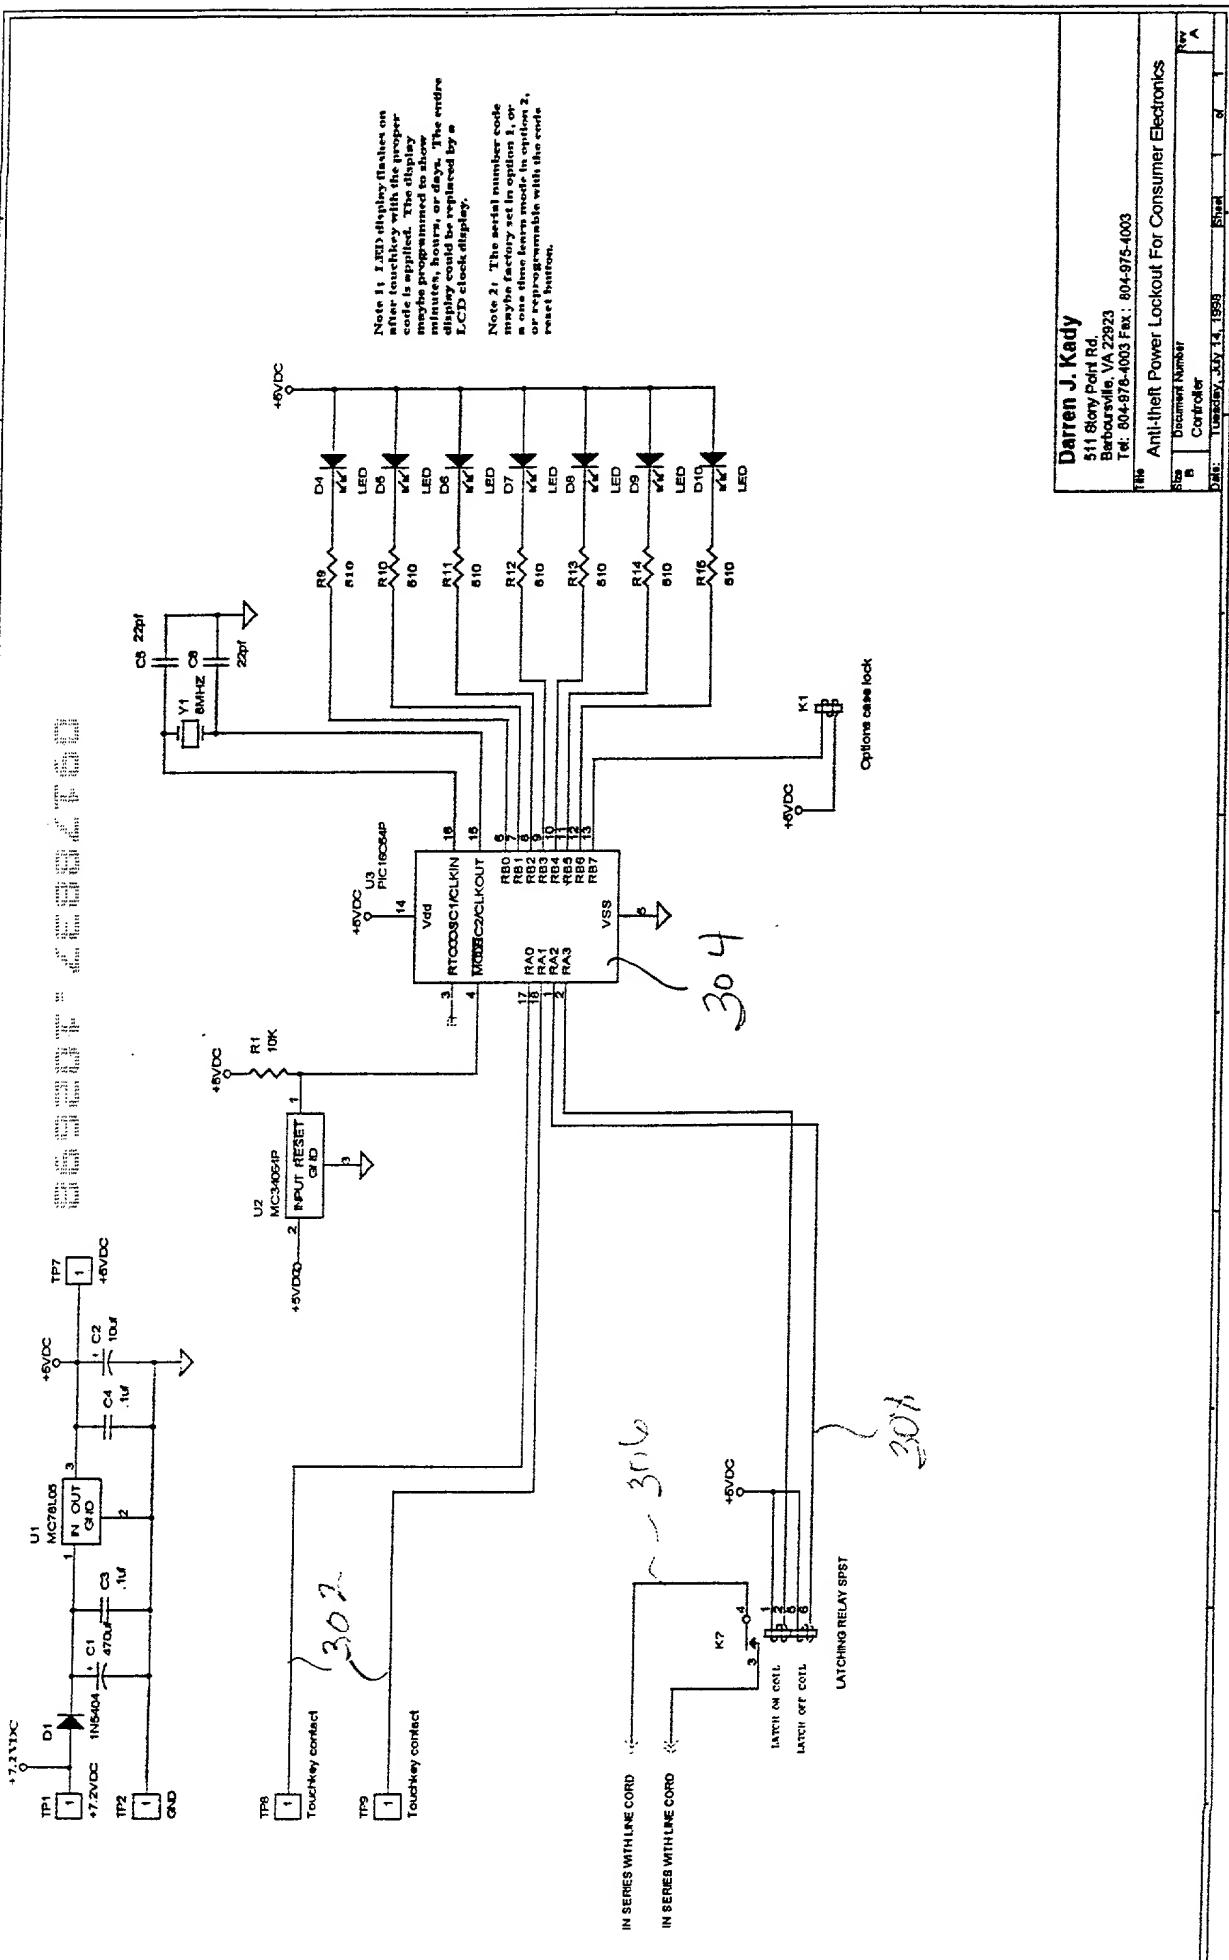

Darren J. Kady

511 Stony Point Rd.
Barbourville, VA 22923
Tel: 804-876-4003 Fax: 804-875-0003


The Anti-theft Power Lockout For Consumer Electronics

Size	Document Number	Rev
A	Controler	1

Date: Tuesday, July 14, 1998

Sheet: 1

Page: 1

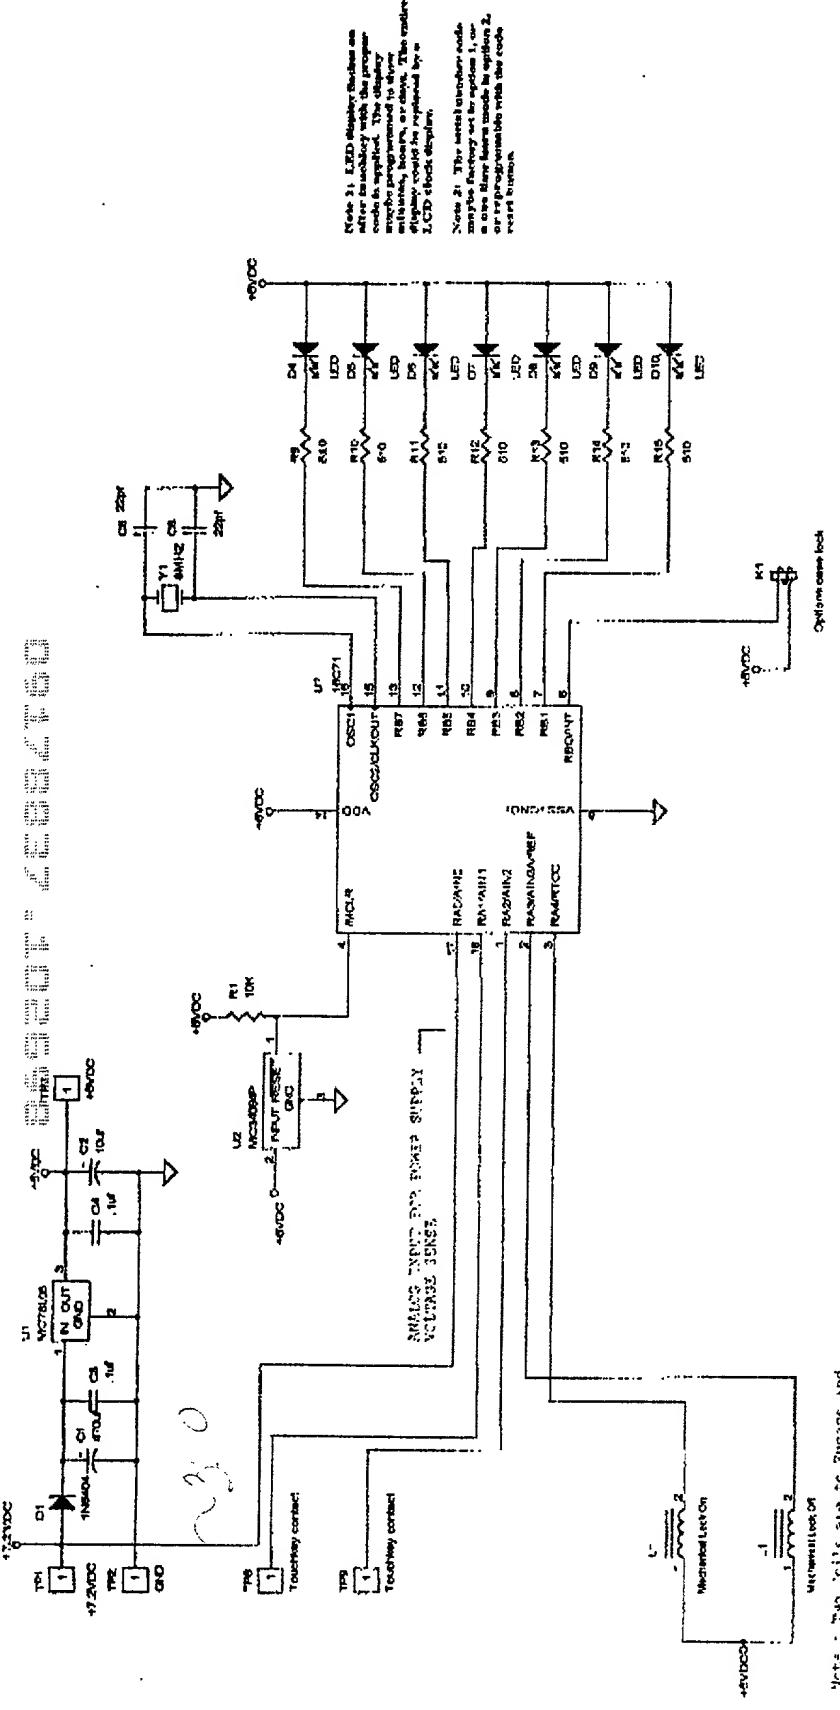


Darren J. Kandy

000-447-000
T-1000-447-000
T-1000-447-000

Mechanical Lockout For Manually Operated Devices

Fig 14

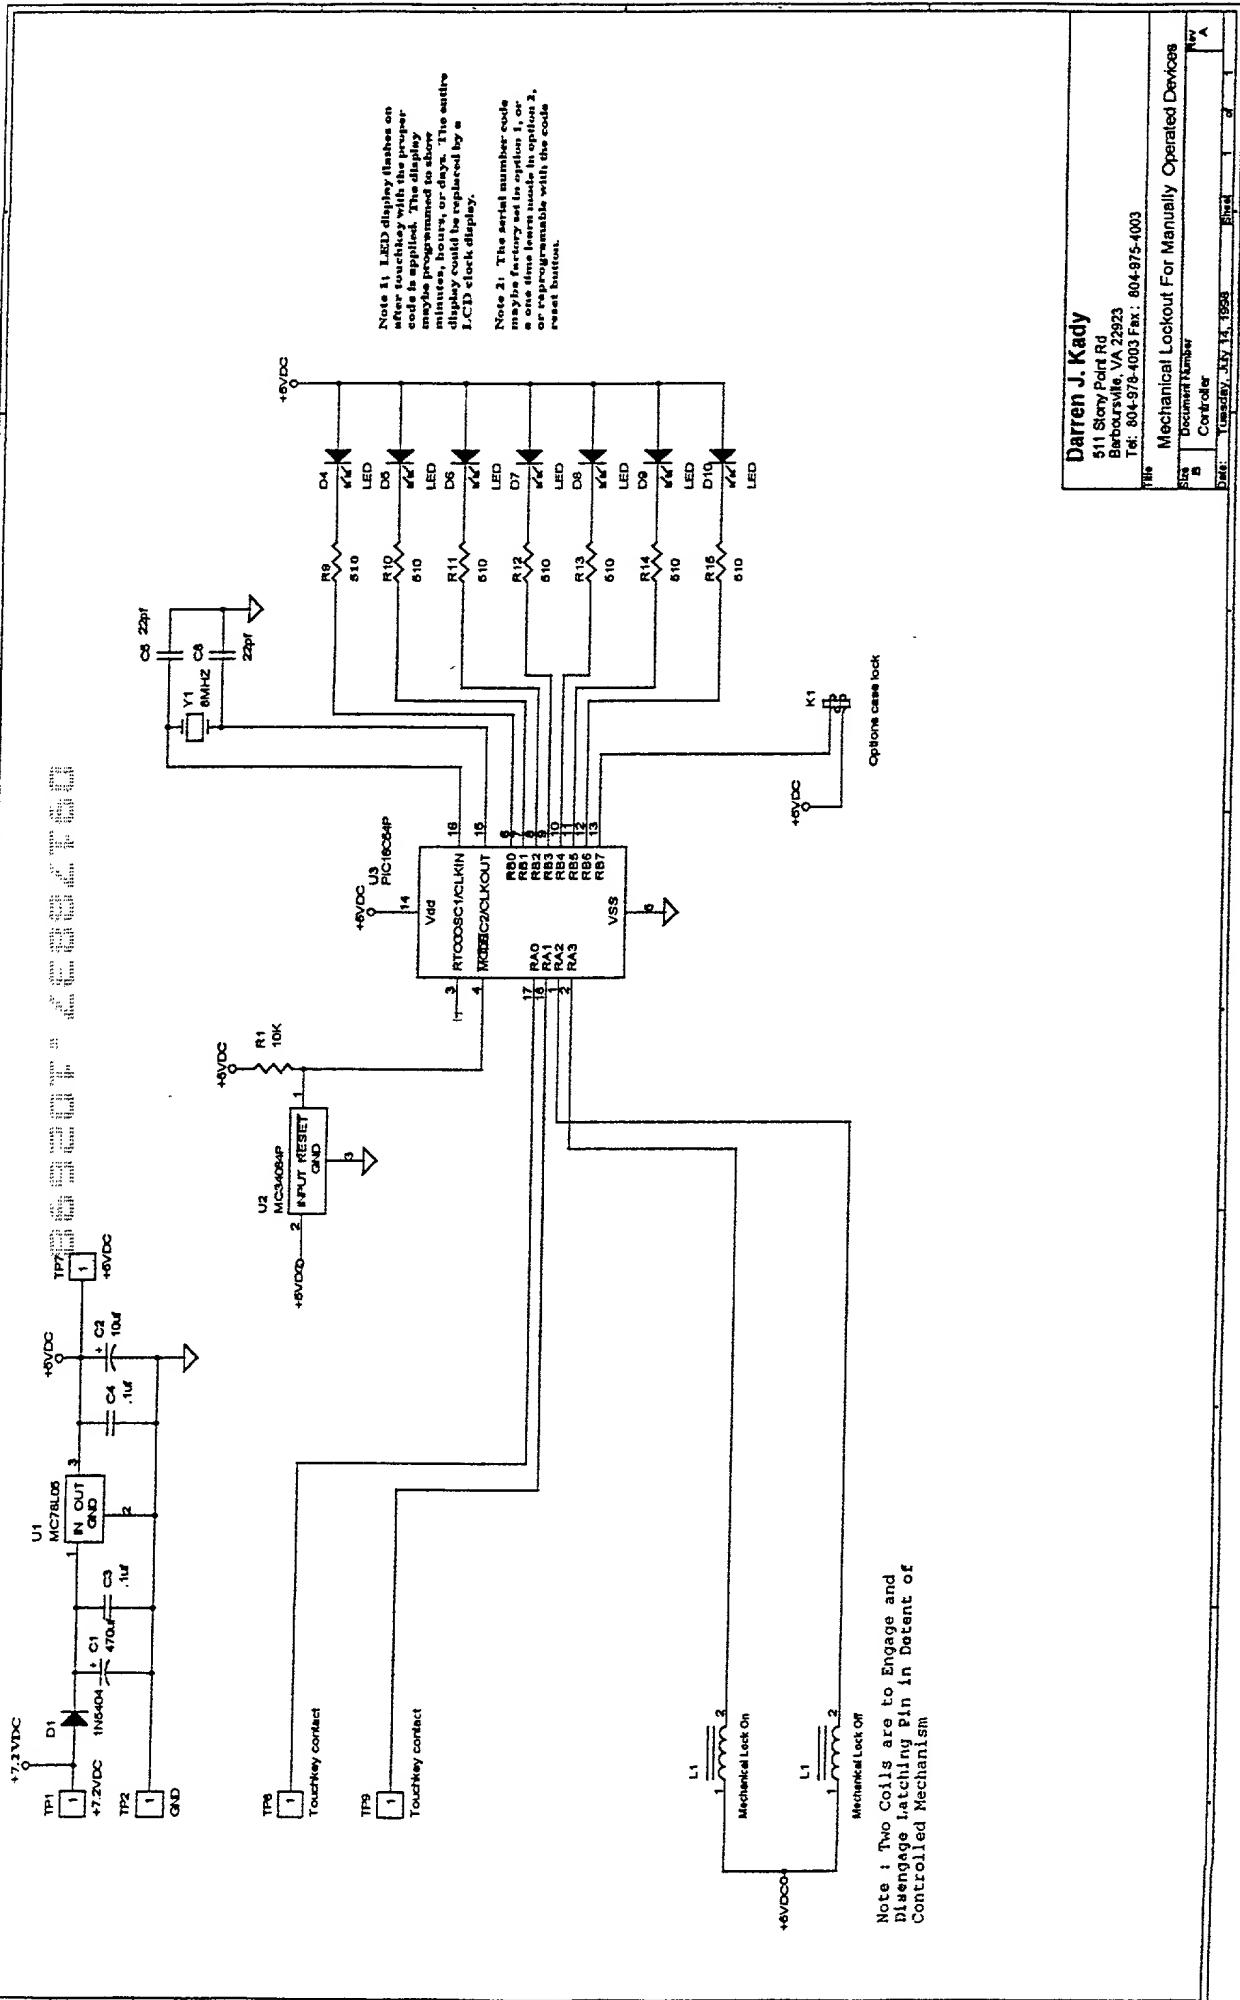


Darren J. Kady

511 Stony Point Rd
Barbourville, VA 24223
Tel: 804-978-4003 Fax: 804-975-4003

Power Source

Combinations
Electronic Control Box
AND SHUT OFF VALVE

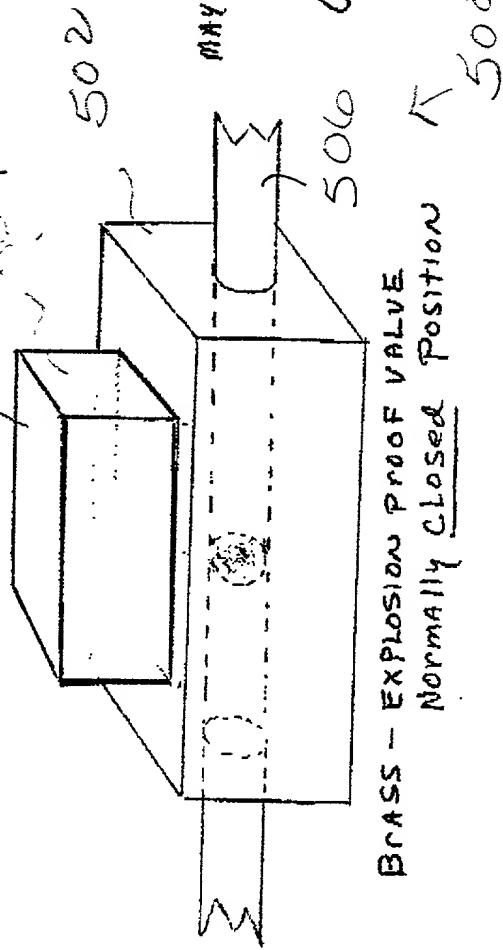

BRASS - EXPLOSION PROOF VALVE
NORMALLY CLOSED POSITION


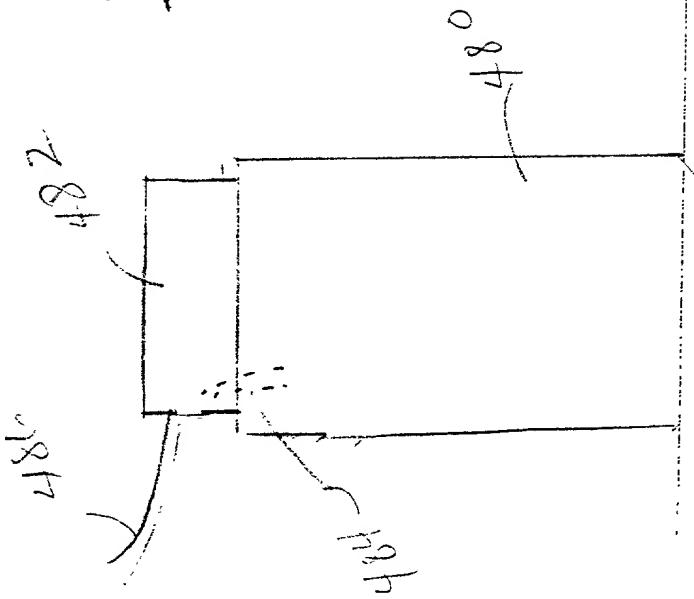


FIG 19

FIG 16

1. CONTROL BOX MAY BE CONTROLLED BY
JUNFA RED
2. SHUT OFF VALVE REMAINS SHUT TILL
POWERED.

May be controlled by Lm FA K-2.

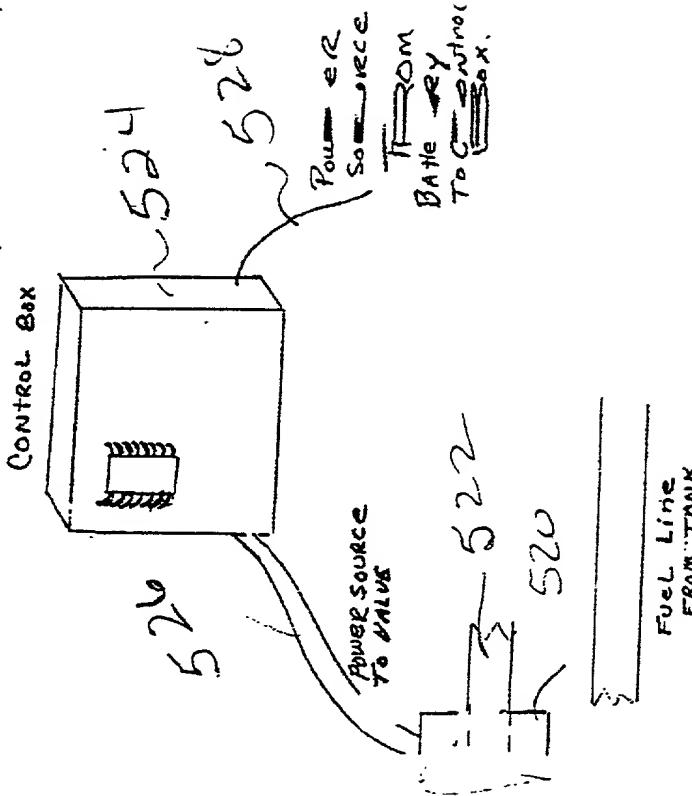

ISOMETRIC VIEW

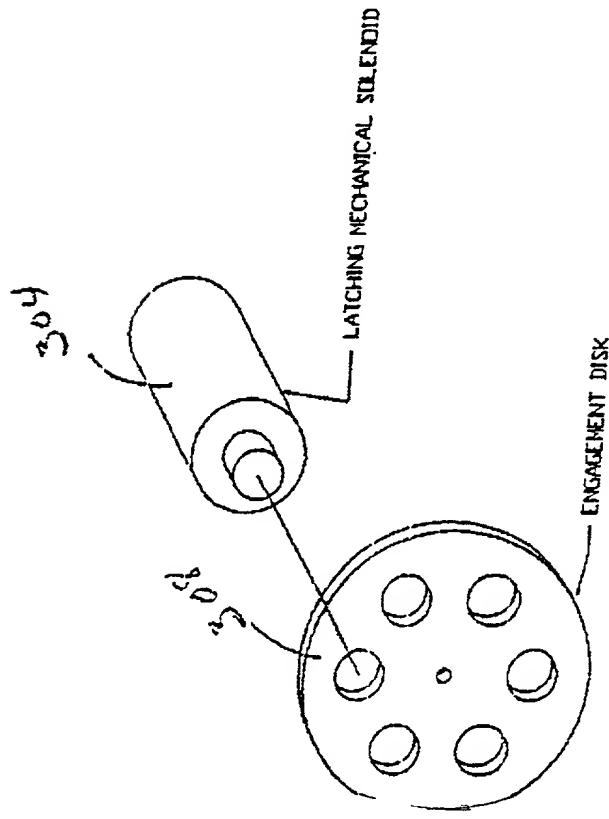


FIG 14

FIG 20

Fuel Line
From Tank.

Docket No.

GC-334

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Locking Device For Tools And Equipment

the specification of which

(check one)

is attached hereto.

was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional

60/065,941

(Application Serial No.)

October 27, 1997

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Sheldon H. Parker, #20,738

Stephen B. Parker, #36,631

Send Correspondence to: Sheldon H. Parker
300 Preston Avenue, Suite 306
Charlottesville, VA 22902

Direct Telephone Calls to: (name and telephone number)
Sheldon H. Parker (804) 977-6606

Full name of sole or first inventor Darren J. Kady	Date
Sole or first inventor's signature <i>Darren J. Kady</i>	<i>10/22/98</i>
Residence 5111 Stony Point Road, Barboursville, Virginia 22933	
Citizenship USA	
Post Office Address 5111 Stony Point Road, Barboursville, Virginia 22933	

Full name of second inventor, if any Deborah A. Kady	Date
Second inventor's signature <i>Deborah A. Kady</i>	<i>10/22/98</i>
Residence 5111 Stony Point Road, Barboursville, Virginia 22933	
Citizenship USA	
Post Office Address 5111 Stony Point Road, Barboursville, Virginia 22933	